


MS-SC18BB-G10

245-252

Series

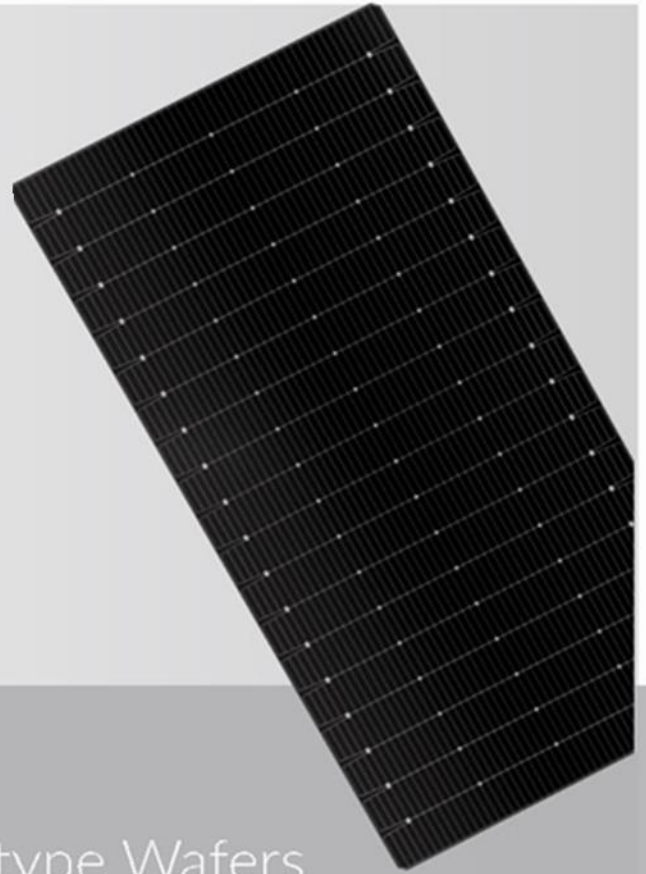


Heterojunction Solar Cell
Great Performace With N-type Wafers

HJT Solar cell is a new generation superior bifacial solar cell model made out of N-type wafer, which combines merits of crystalline silicon and thin film technology to form single composite structure. As one of most effective cell passivation technology in the market, HJT ensures solar cells deliver high efficiency and great power even in hot climate.

Higher Cell Efficiency


- Phosphorus fettering combines with double-sided microcrystal process to guarantee higher cell efficiency.
- Ultra-low temperature coefficient ensures higher and more power output in high temperature environment.
- No LID, No PID, lead to zero degradation.



Front Side

Maximum Module Power


- Half silicon ingot cutting wafer and SMBB technology to deliver higher energy output and lower power loss.
- The Natural bifacial symmetrical structure of HJT cell can effectively improve the power generation capacity on cell's backside.
- No LID and No PID effectively extends the PV module life.
- PV systems with Low LCOE with HJT modules



Back Side

Mechanical Characteristics

Product	HJT Monocrystalline solar cell
Format	18BB, N-type, 182mm*91.75mm±0.25mm
Average Thickness (Si)	130μm ±13μm
Front Surface(-)	18 soldering pads (silver) Dark blue anti-reflecting ITO coating (Indium tin oxide)
Back Surface(+)	18 soldering pads (silver) Dark blue anti-reflecting ITO coating (Indium tin oxide)

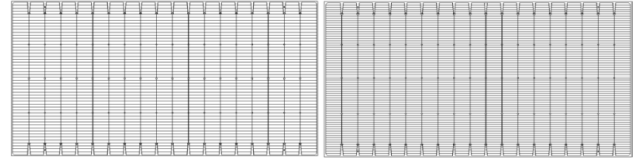


ELECTRICAL CHARACTERISTICS (STC)


Power Class			MS-G10-245	MS-G10-246	MS-G10-247	MS-G10-248	MS-G10-249	MS-G10-250	MS-G10-251	MS-G10-252
Maximum Power	P _{mp}	[W]	4.10	4.12	4.14	4.15	4.17	4.18	4.19	4.21
Short Circuit Current	I _{sc}	[A]	6.53	6.54	6.55	6.56	6.57	6.58	6.59	6.60
Open Circuit Voltage	V _{oc}	[V]	0.747	0.747	0.747	0.747	0.747	0.748	0.748	0.748
Efficiency	η	[%]	24.5	24.6	24.7	24.8	24.9	25.0	25.1	25.2

*PERFORMANCE AT STANDARD TEST CONDITIONS, STC: 1000 W/m², 25 C, AM 1.5 G

TYPICAL CURRENT/POWER-VOLTAGE CURVES (25.0%)

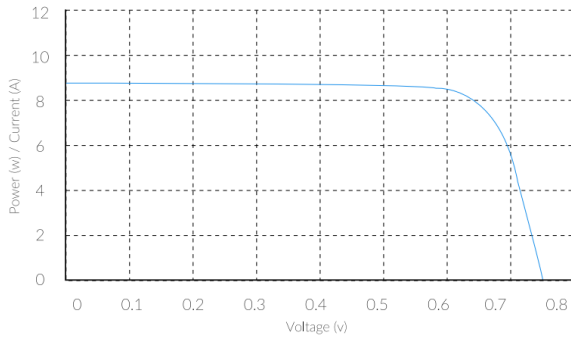

SPECTRAL RESPONSE

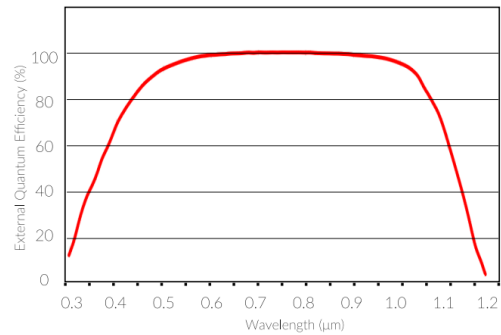

PACKING SPECIFICATIONS

pcs/box	box/carton	pcs/carton
132	18	2376

TEMPERATURE COEFFICIENTS

Power (P _{max})	-0.26%/K
Current (I _{sc})	+0.055%/K
Voltage (V _{oc})	-0.27%/K

Remind of Storage

If the sealing foil around the cell boxes is damaged, broken or opened, we suggest that:

- Store the cells in dry and clean place at room temperature
- Process the cells within 10 days after opening the seal.

深圳市泰晶太阳能科技有限公司

地址: 深圳市宝安区松岗芙蓉路8号鑫伟润高新产业园

网址: www.macsunsolar.com

邮箱: info@macsunsolar.com



Macsun Solar Energy Technology Co., Ltd.

Add: Xinweirun Industrial Park, Furong Rd., Songgang Str., Baoan Dist., Shenzhen

Web: www.macsunsolar.com

E-mail: sales@macsunsolar.com