


105 Watt

24 Cell Polycrystalline Module

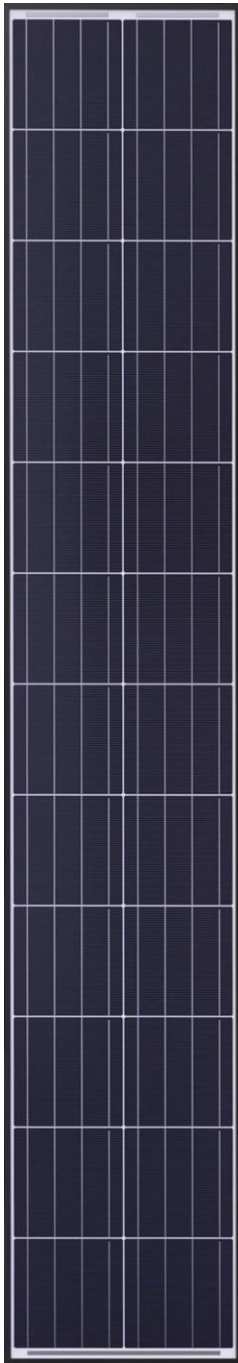

Features

Ultra-light: Through replacement of the glass and optimization of the frame weighs as 70% less than conventional PV panels.

Aesthetics: Aesthetically pleasing design with patented materials and sophisticated manufacturing process results in a high-efficiency, attractive panel, with no light pollution and high levels of safety.

Easy Installation: It can reduce installation cost significantly through the use of re-engineered components, ease of handling and faster in-stallation.

No-glass: No fragile glass design lead to PID-free and more safety in handling, transportation, installation and operation.

Transportation: Its innovative frame and low weight will very significantly reduce the cost of transportation.

Deployment: Ultra-light weight and customizable size make it the best choice to change the way how solar is deployed in the market and bring added value to special applications.

Durability: The panels are certified to withstand extreme wind (2400 Pascal) and snow loads (5400 Pascal), while special materials and stringent quality control ensure panel longevity.

100-105 W

POWER OUTPUT RANGE

0-5 W

POWER TOLERANCE

LINEAR PERFORMANCE WARRANTY

10 Year Product Warranty

25 Year Linear Power Warranty



MS-PFSP105P-2X12

MS-PFSP100P-2X12

Electrical Characteristics

STC	PFSP105P-2X12	PFSP100P-2X12
Maximum Power (P_{max})	105	100
Maximum Power Voltage (V_{mp})	12.7	12.4
Maximum Power Current (I_{mp})	8.27	8.07
Open-circuit Voltage (V_{oc})	15.4	15.2
Short-circuit Current (I_{sc})	8.73	8.52
Module Efficiency (%)	15.6	14.8
Operating Temperature ($^{\circ}C$)	-40 $^{\circ}C$ to 85 $^{\circ}C$	
Maximum System Voltage	600 V DC (IEC)	
Maximum Series Fuse Rating	20 A	
Application Class	Class A	
Power Tolerance	0/+5 W	

STC: Irradiance 1000W/m², Cell temperature 25 $^{\circ}C$, AM=1.5.

NOCT	PFSP105P-2X12	PFSP100P-2X12
Maximum Power (P_{max})	78	74
Maximum Power Voltage (V_{mp})	11.7	11.5
Maximum Power Current (I_{mp})	6.67	6.44
Open-circuit Voltage (V_{oc})	14.3	14.1
Short-circuit Current (I_{sc})	7.00	6.83

NOCT: Irradiance 800W/m², Ambient temperature 20 $^{\circ}C$, Wind speed 1 m/s.

Mechanical Characteristics

Solar Cell	Polycrystalline silicon (6 inches)
No. of Cells	24 (2 × 12)
Module Dimensions	1955×345×20 mm (77.0×13.6×0.8 inch)
Weight	3.6 kgs (7.9 lbs)
Backsheet	White
Frame	Black Anodized Aluminium Alloy
J-box	IP 68 rated
Output Cables	Photovoltaic technology cable 4.0 mm ² , (+)150 / (-)450 mm
Connector	MC4 compatible


Packaging Configuration

	20' GP	40' HC
Module per pallet	100	100
Pieces per container	1000	3600


CAUTION: Read installation manual before using the product.

© 2018 Macsun Solar Technology Co., Limited. All rights reserved. Specifications included in this datasheet are subject to change without notice.

Dimensions

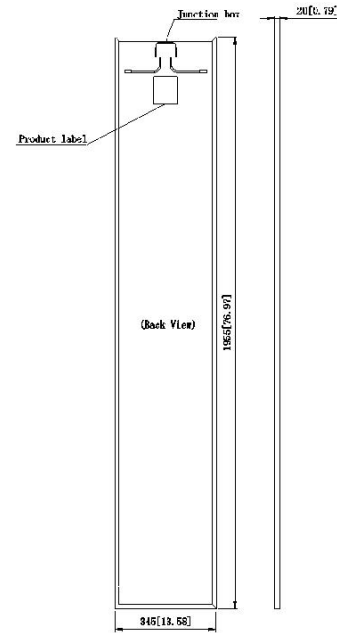

I-V Curve (105)

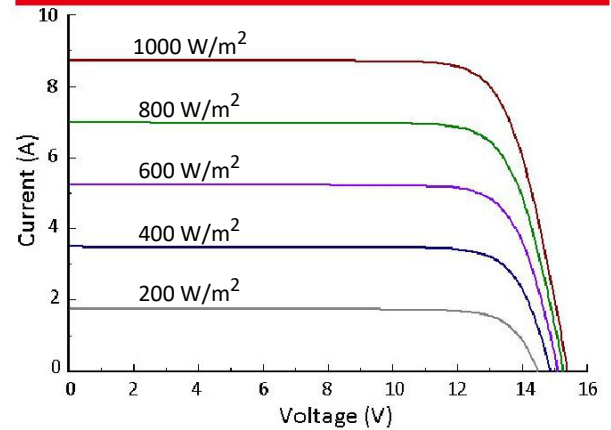

Temperature Characteristics

Nominal Operating Cell Temperature (NOCT)	45 ± 2 $^{\circ}C$
Temperature Coefficient of P_{max}	-0.41 %/ $^{\circ}C$
Temperature Coefficient of V_{oc}	-0.30 %/ $^{\circ}C$
Temperature Coefficient of I_{sc}	0.048 %/ $^{\circ}C$

Dealer Information:

MS_IEC_EN_2018A